




**Foot valve type 561 PVC-U**  
With solvent cement sockets metric

**Model:**

- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- Sealing at a minimum water column of 2 m

| d<br>(mm) | DN<br>(mm) | PN<br>(bar) | kv-value<br>( $\Delta p=1$ bar)<br>(l/min) | EPDM<br>Code       | SP | Weight<br>(kg) | D<br>(mm) | L<br>(mm) | L2<br>(mm) | z<br>(mm) | closest<br>inch<br>(inch) |
|-----------|------------|-------------|--|--------------------|----|----------------|-----------|-----------|------------|-----------|---------------------------|
| 16        | 10         | 16          | 190  | <b>161 561 901</b> | 1  | 0.120          | 50        | 173       | 56         | 64        | $\frac{3}{8}$             |
| 20        | 15         | 16          | 180  | <b>161 561 902</b> | 1  | 0.130          | 50        | 175       | 56         | 64        | $\frac{1}{2}$             |
| 25        | 20         | 16          | 380  | <b>161 561 903</b> | 1  | 0.250          | 58        | 192       | 65         | 72        | $\frac{3}{4}$             |
| 32        | 25         | 16          | 460  | <b>161 561 904</b> | 1  | 0.290          | 68        | 204       | 71         | 79        | 1                         |
| 40        | 32         | 16          | 850  | <b>161 561 905</b> | 1  | 0.510          | 90        | 267       | 85         | 94        | 1 $\frac{1}{4}$           |
| 50        | 40         | 16          | 1080                                       | <b>161 561 906</b> | 1  | 0.750          | 90        | 282       | 83         | 95        | 1 $\frac{1}{2}$           |
| 63        | 50         | 16          | 1670                                       | <b>161 561 907</b> | 1  | 1.330          | 90        | 310       | 101        | 107       | 2                         |

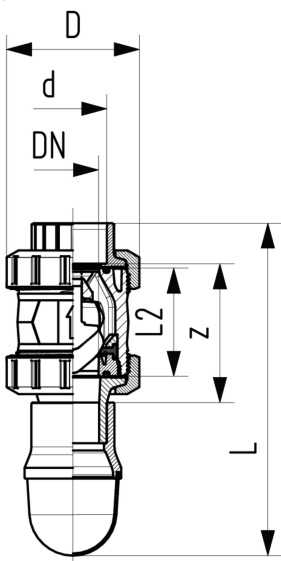

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: [info.ps@georgfischer.com](mailto:info.ps@georgfischer.com)

Internet: <http://www.gfps.com>