


Check valve type 561 PVC-C With threaded sockets Rp

Model:

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

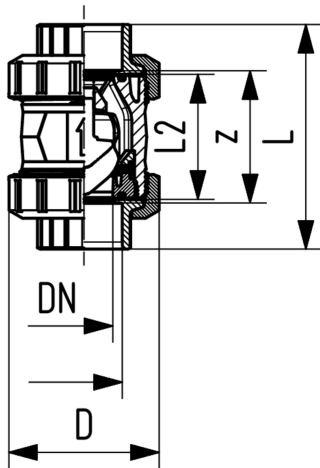

Rp (inch)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
3/8	10	10	190	163 561 021	1	0.120	163 561 031	1	0.120
1/2	15	10	180	163 561 022	1	0.120	163 561 032	1	0.120
3/4	20	10	380	163 561 023	1	0.260	163 561 033	1	0.280
1	25	10	460	163 561 024	1	0.290	163 561 034	1	0.290
1 1/4	32	10	850	163 561 025	1	0.490	163 561 035	1	0.500
1 1/2	40	10	1080	163 561 026	1	0.740	163 561 036	1	0.750
2	50	10	1670	163 561 027	1	1.530	163 561 037	1	1.530
2 1/2	65	10	2950	163 561 028	1	3.530	163 561 038	1	3.550
3	80	10	3600	163 561 029	1	5.670	163 561 039	1	5.700
4	100	10	4150	163 561 030	1	8.990	163 561 040	1	9.030

Rp (inch)	D (mm)	L (mm)	L2 (mm)	z (mm)
3/8	50	95	56	69
1/2	50	100	56	67
3/4	58	114	65	78
1	68	127	71	85
1 1/4	84	146	85	100
1 1/2	97	152	89	106
2	124	177	101	121
2 1/2	166	233	136	144
3	200	254	141	151
4	238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>